



# PRIME LINE PRIME TIME

# MAGPRO 35 KOMPAKT

Ref. 490050



198 mm

**795,-€**  
excl. VAT



### Scope of delivery:

Case, safety strap, chip protection, tools



Ø 35 mm  
Core drill max.



Ø 11 mm  
Twist drill max.



1.100 W  
Power input



230 V / 50 Hz  
Voltage



Weldon 19  
Shank



650 min<sup>-1</sup>  
No load speed



30 mm  
Cutting depth max.



35 mm  
Stroke



10 kg  
Net weight



15.000 N  
Magnetic adhesion



Integrated cooling system



Quick-release tool holder

### Accessories (optional)



HSS twist drill set (Weldon 19)  
Ref. 490400SET

- Ø 6, 7, 8, 9, 10, 11 mm + ejector pin
- Cutting depth: 30 mm
- 19 mm Weldon shank
- Drilling in the tightest of spaces

**€ 159,00**  
excl. VAT



Complete range of core drills  
HSS-CO Ø12 - 130 mm  
TIN-coated Ø 12 - 60 mm

**Page 7**

# MAGPRO 40 1 SPEED

Ref. 491140K



**770,-€**  
excl. VAT




### Scope of delivery:

Case, safety chain, snap hook, coolant container, hexagon key, ejector pins short/long



Ø 40 mm  
Core drill max.



Ø 13 mm  
Twist drill max.



1.100 W  
Power input



230 V / 50 Hz  
Voltage




Weldon 19  
Shank



625 min<sup>-1</sup>  
No load speed



110 mm  
Cutting depth max.



85 - 200 mm  
Stroke



12 kg  
Net weight



10.500 N  
Magnetic adhesion



Integrated cooling system



Quick-release tool holder

### Accessories (optional)



13 mm drill chuck with adapter 19 mm  
Ref. 490152A

**€ 42,00**  
excl. VAT



Complete range of core drills  
HSS-CO Ø12 - 130 mm  
TIN-coated Ø 12 - 60 mm

**Page 7**

# MAGPRO 40 1 SPEED ADJUST SWIVEL

Ref. 490140S


















**789,- €**  
excl. VAT





**Scope of delivery:**

Case, safety chain, snap hook, coolant container, hexagon key, ejector pins short/long

 Ø 40 mm Core drill max.	 Ø 13 mm Twist drill max.	 Weldon 19 Shank	 625 min <sup>-1</sup> No load speed
 1.100 W Power input	 230 V / 50 Hz Voltage	 Weldon 19 Shank	 625 min <sup>-1</sup> No load speed
 110 mm Cutting depth max.	 85 - 200 mm Stroke	 12 kg Net weight	 10.500 N Magnetic adhesion

-  Integrated cooling system
-  Quick-release tool holder
-  Swivel Base: 2x 15° | ± 15 cm

**Accessories (optional)**

	13 mm drill chuck with adapter 19 mm Ref. 490152A	<b>€ 42,00</b> excl. VAT
	Complete range of core drills HSS-CO Ø12 - 130 mm TIN-coated Ø 12 - 60 mm	<b>Page 7</b>

# MAGPRO 40 2 SPEED

Ref. 490050




**799,- €**  
excl. VAT






**Scope of delivery:**

Case, safety strap, coolant tank, tools, chip protection

 Ø 40 mm Core drill max.	 Ø 13 mm Twist drill max.	 30 mm Countersink max.
 1.100 W Power input	 230 V / 50 Hz Voltage	 Weldon 19 Shank
 110 mm Cutting depth max.	 85 - 165 mm Stroke	 13 kg Net weight

-  Integrated cooling system

**Accessories (optional)**

	13 mm drill chuck with adapter 19 mm Ref. 490152A	<b>€ 42,00</b> excl. VAT
	Weldon adapter 19 mm (3/4") for FEIN core drills with quick-in holder and ejector/centering pin Ref. 490154	<b>€ 81,00</b> excl. VAT
	Complete range of core drills HSS-CO Ø12 - 130 mm TIN-coated Ø 12 - 60 mm	<b>Page 7</b>



**MAGPRO 60  
2 SPEED**  
Ref. 491170N



**1.195,- €**  
excl. VAT



**Scope of delivery:**

Case, MT2 / Weldon 19 arbor, safety chain, snap hook, hexagon key, ejector pins short/long



Ø 60 mm  
Core drill max.



Ø 23 mm  
Twist drill max.



Ø 55 mm  
Countersink max.



1.550 W  
Power input



230 V / 50 Hz  
Voltage



MT2 +19  
Shank



250-605 min<sup>-1</sup>  
No load speed



110 mm  
Cutting depth max.



190 mm  
Stroke



17 kg  
Net weight



15.300 N  
Magnetic adhesion

Integrated cooling system

**MAGPRO 60  
AUTOMATIC**  
Ref. 491180N

**WINTER 2024**



**1.375,- €**  
excl. VAT



**Scope of delivery:**

Case, MT2 / Weldon 19 arbor, safety chain, snap hook, hexagon key, ejector pins short/long



Ø 60 mm  
Core drill max.



Ø 23 mm  
Twist drill max.



Ø 55 mm  
Countersink max.



1.550 W  
Power input



230 V / 50 Hz  
Voltage



MT2 +19  
Shank



250-605 min<sup>-1</sup>  
No load speed



110 mm  
Cutting depth max.



190 mm  
Stroke



17 kg  
Net weight



15.300 N  
Magnetic adhesion

Integrated cooling system

Automatic feed

**Accessories (optional)**

	13 mm drill chuck with adapter 19 mm Ref. 490152A	<b>€ 42,00</b> excl. VAT
--	--	-----------------------------

	13 mm drill chuck with adapter MT2 Ref. 490164MK2	<b>€ 90,70</b> excl. VAT
--	--	-----------------------------

	Complete range of core drills HSS-CO Ø12 - 130 mm TIN-coated Ø12 - 60 mm	<b>Page 7</b>
--	--	---------------

**Accessories (optional)**

	13 mm drill chuck with adapter 19 mm Ref. 490152A	<b>€ 42,00</b> excl. VAT
--	--	-----------------------------

	13 mm drill chuck with adapter MT2 Ref. 490164MK2	<b>€ 90,70</b> excl. VAT
--	--	-----------------------------

	Complete range of core drills HSS-CO Ø12 - 130 mm TIN-coated Ø12 - 60 mm	<b>Page 7</b>
--	--	---------------

# MAGPRO 80 4 SPEED

Ref. 490184



**1.237,- €**  
excl. VAT



**Scope of delivery:**

Case, MT3 / Weldon 19 arbor, safety strap, coolant tank, tools, chip protection, ejector wedge

Ø 80 mm Core drill max.	Ø 32 mm Twist drill max.	Ø 55 mm Countersink max.
1.600 W Power input	230 V / 50 Hz Voltage	MT3 +19 Shank
110 mm Cutting depth max.	85 - 270 mm Stroke	24 kg Net weight
17.000 N Magnetic adhesion		

Integrated cooling system

# MAGPRO 100 M30

Ref. 491100N



**1.969,- €**  
excl. VAT



**Scope of delivery:**

Case, MT3 / Weldon 19 & 32 mount, safety chain, snap hook, hexagon key, ejector pins short/long

Ø 100 mm Core drill max.	Ø 32 mm Twist drill max.	M30 Thread cutter max.	Ø 63 mm Countersink max.
1.880 W Power input	230 V / 50 Hz Voltage	MT3 +19 +32 Shank	70-605 min <sup>-1</sup> No load speed
110 mm Cutting depth max.	260 mm Stroke	26 kg Net weight	17.600 N Magnetic adhesion

Integrated cooling system

Reversible motor

Patented sliding rail

**Accessories (optional)**

	16 mm drill chuck with adapter 19 mm Ref. 490164	<b>€ 103,00</b> excl. VAT
	Weldon 32 MT3 adapter for core drills from Ø 61 mm Ref. 490163	<b>€ 99,00</b> excl. VAT
	Weldon adapter 19 mm (3/4") for FEIN core drills with quick-in holder and ejector/centering pin Ref. 490154	<b>€ 81,00</b> excl. VAT
	Complete range of core drills HSS-CO Ø12 - 130 mm TIN-coated Ø12 - 60 mm	<b>Page 7</b>

**Accessories (optional)**


	16 mm drill chuck with adapter 19 mm Ref. 490164	<b>€ 103,00</b> excl. VAT
	Range of thread cutting systems available MT3 adapter for thread cutters M3-14   M5-M22   M14-M30 Thread cutter inserts M3-M30 available individually	
	Complete range of core drills HSS-CO Ø12 - 130 mm TIN-coated Ø12 - 60 mm	<b>Page 7</b>

# MAGPRO 150

## M42

Ref. 491150N

PRIME LINE

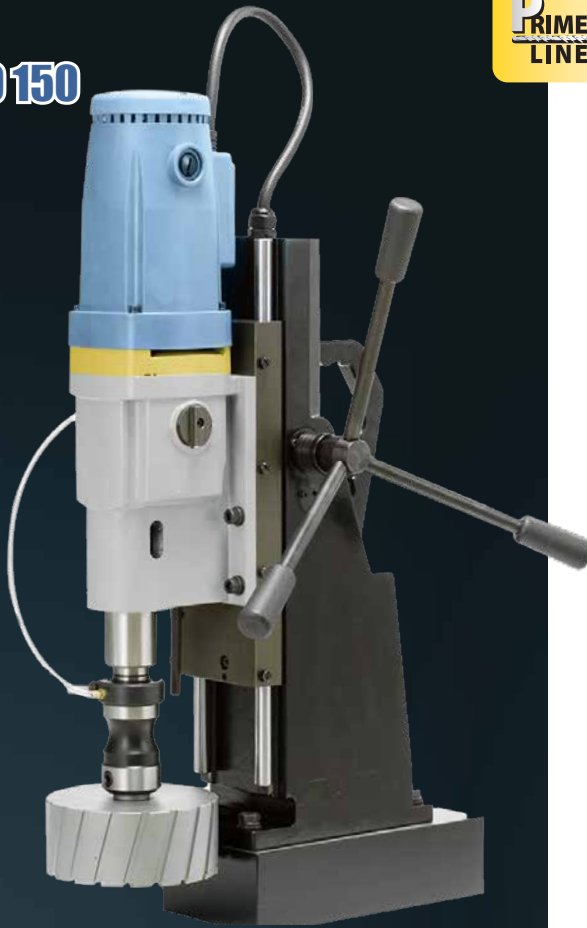




3.998,-€  
excl. VAT



### Scope of delivery:

Case, MT4 / Weldon 32 mount, Weldon 19 adapter, safety chain, snap hook, hexagon key, ejector pins short/long

 Ø 150 mm Core drill max.	 Ø 46 mm Twist drill max.	 M42 Thread cutter max.	 Ø 63 mm Countersink max.
 2.400 W Power input	 230 V / 50 Hz Voltage	 MT4 +19+32 Shank	 60-545 min <sup>-1</sup> No load speed
 110 mm Cutting depth max.	 300 mm Stroke	 42 kg Net weight	 20.500 N Magnetic adhesion

-  Integrated cooling system
-  Reversible motor
-  Patented sliding rail

### Accessories (optional)



Range of thread cutting systems available  
MT4 adapter for thread cutters M5-M22 | M14-M30 | M20-M42  
Thread cutter inserts M5-M42 available individually



Complete range of core drills  
HSS-CO Ø12 - 130 mm  
TIN-coated Ø 12 - 60 mm

Page 7

# MAGPRO 200

## M52

Ref. 491200N

AUTUMN 2024


















5998,-€  
excl. VAT



### Scope of delivery:

Case, MT5 / Weldon 32 mount, safety chain, snap hook, hexagon key, ejector pins short/long

 Ø 200 mm Core drill max.	 Ø 56 mm Twist drill max.	 M52 Thread cutter max.	 Ø 63 mm Countersink max.
 2.850 W Power input	 230 V / 50 Hz Voltage	 MT5 +32 Shank	 50-555 min <sup>-1</sup> No load speed
 110 mm Cutting depth max.	 330 mm Stroke	 52 kg Net weight	 26.800 N Magnetic adhesion

-  Integrated cooling system
-  Reversible motor
-  Patented sliding rail

### Accessories (optional)



Complete range of core drills  
HSS-CO Ø12 - 130 mm  
TIN-coated Ø 12 - 60 mm

Page 7

### Further accessories on request

# CORE DRILLS

MADE  
IN  
GERMANY



## HSS-Co

Fully hardened HSS core drills. With our core drills, the cutting surface is reduced to a minimum. This makes the drilling process more economical, faster and results in longer service life. The result is particularly precise holes without pre-drilling.



**Ø 12 - 60 mm**  
Cutting depth 30 mm  
Ref. 490212 - 490260

- 19 mm Weldon arbor
- Full grinding technology
- Longer service life
- Improved chip removal



**Ø 61 - 130 mm**  
Cutting depth 30 mm  
Ref. 490261 - 4902130

- 32 mm Weldon arbor
- Full grinding technology
- Longer service life
- Improved chip removal



**Ø 12 - 60 mm**  
Cutting depth 55 mm  
Ref. 490512 - 490560

- 19 mm Weldon arbor
- Full grinding technology
- Longer service life
- Improved chip removal



**Ø 61 - 130 mm**  
Cutting depth 55 mm  
Ref. 490561 - 4905130

- 32 mm Weldon arbor
- Full grinding technology
- Longer service life
- Improved chip removal



**HSS-Co core drill set**  
Ref. 490145

- Ø 12, 14, 16, 18, 20, 22 mm + ejector pin
- Drilling depth: 30 mm
- 19 mm Weldon shank
- Full-grinding technology
- Longer service life
- Improved chip removal

**€ 114,00**  
excl. VAT



## „GOLD FINGER“ TiN high performance core drill

Fully hardened, TiN coated HSS core drills. TiN means very high abrasion resistance and low reactivity. Therefore, tool wear is significantly reduced by coating. The TiN coating enables machining of hard steels such as ST 52 and stainless steel (in contrast to HSS-Co for conventional steels).



**Ø 12 - 60 mm**  
Cutting depth 30 mm

- 19 mm Weldon shank
- High abrasion resistance and low reactivity
- Very long service life



**Gold Finger - high performance core drill**  
TiN coated | Ref. 490145TiN

- Ø 12, 14, 16, 18, 20, 22 mm + ejector pin
- Cutting depth: 30 mm
- 19 mm Weldon shank
- High abrasion resistance and low reactivity
- Very long service life

**€ 228,00**  
excl. VAT

## CARBIDE TIPPED



**Carbide tipped core drill set**  
Ref. 490148

- Ø 12, 14, 16, 18, 20, 22 mm + ejector pin
- Cutting depth: 35 mm
- 19 mm Weldon shank
- Core drilling in stainless steel
- Longer service life
- Improved chip removal

**€ 207,00**  
excl. VAT

## HSS TWIST DRILLS



**HSS twist drill set**  
Ref. 490400SET

- Ø 6, 7, 8, 9, 10, 11 mm + ejector pin
- Cutting depth: 30 mm
- 19 mm Weldon shank
- Drilling in the tightest of spaces

**€ 159,00**  
excl. VAT



# MAGPRO 60 M20



**1.325,- €**  
excl. VAT



**Scope of delivery:**

Case, MT2 / Weldon 19 arbor, safety chain, snap hook, hexagon key, ejector pins short/long.

**Accessories (optional)**

	13 mm drill chuck with adapter 19 mm Ref. 490152A	<b>€ 42,00</b> excl. VAT
	13 mm drill chuck with adapter MT2 Ref. 490164MK2	<b>€ 90,70</b> excl. VAT
	Complete range of core drills HSS-CO Ø12 - 130 mm TIN-coated Ø12 - 60 mm	<b>Page 7</b>
	Range of thread cutting systems MT2 adapter for thread cutters M5-M16 Thread cutter inserts available individually	

- Ø 60 mm**  
Core drill max.
- Ø 23 mm**  
Twist drill max.
- M20**  
Thread cutter max.
- Ø 55 mm**  
Countersink max.
- 1.550 W**  
Power input
- 230 V / 50 Hz**  
Voltage
- MT2 +19**  
Shank
- 250-605 min<sup>-1</sup>**  
No load speed
- 110 mm**  
Cutting depth max.
- 190 mm**  
Stroke
- 17 kg**  
Net weight
- 15.300 N**  
Magnetic adhesion

- Integrated cooling system
- Reversible motor

